



GNSS RECEIVER

TRIUMPH-3



The new powerful and reliable receiver for high-precision navigation systems is based on our 864 channel chip, equipped with the internal 4G/LTE/3G card, secure, accessible microSD and microSIM cards, and supports “Lift & Tilt” technology. The TRIUMPH-3 receiver can operate as a receiver for post-processing, as a Continuously Operating Reference Station (CORS) or portable base station for Real-time Kinematic (RTK) applications, and as a scientific station collecting information for individual studies, such as ionosphere monitoring and the like. In one word, it includes everything you need to perform the highly efficient job.

TRIUMPH-3

GNSS RECEIVER

Total 864 channels: all-in-view	
Signals Tracked	GPS C/A, L1C(P+D), P1, P2, L2C(L+M), L5(I+Q) GLONASS C/A, P1, P2, L2C, L3(I+Q) Gallileo E1(B+C), E5A(I+Q), E5B(I+Q), AltBoc, E6(B+C) QZSS C/A, L1C(P+D), L2C(L+M), L5(I+Q), SAIF, LEX(P+D) BeiDou B1, B1-2, B1C(P+D), B5A(I+Q), B2, B5B(I+Q), B3 SBAS L1, L5 IRNSS L5
Autonomous Accuracy (rms)	<2 m
Static, Fast Static Accuracy (rms)	Horizontal: 0.3 cm + 0.1 ppm * base_line_length** Vertical: 0.35 cm + 0.4 ppm * base_line_length
Kinematic Accuracy (rms)	Horizontal: 1 cm + 1 ppm * base_line_length Vertical: 1.5 cm + 1 ppm * base_line_length
RTK (OTF) Accuracy (rms)	Horizontal: 1 cm + 1 ppm * base_line_length Vertical: 1.5 cm + 1 ppm * base_line_length
DGPS Accuracy (rms)	< 0.25 m (post-processing) < 0.5 m (real-time)
Cold Start	<35 seconds
Warm Start	<5 seconds
Reacquisition	<1 second

INTERNAL GNSS ANTENNA

Versatile High Performance Geodetic Antenna

Antenna Type	Microstrip (Zero Centered)
Ground Plane	Antenna on a flat ground plane
LNA Gain	32±2 dB

ENVIRONMENTAL

Enclosure	Molded magnesium alloy and plastic, IP67
Color	Gray
Operating Temperature***	-40° C to +60° C
Storage Temperature***	-20° C to +45° C
Humidity	100% condensing
Dimensions	7.16 x 3.78 x 3.07 in (182 x 96 x 78 mm)
Weight	2.755 lbs (1.25 kg)
Shock	Survives a 2 m drop onto hard surface

* For the full list of standard and optional features see www.javad.com

** For good observation conditions and proper length of observation session

***Li-Ion batteries are the temperature limiting factor

TRIUMPH-3

RADIO

4G LTE Mini Card	LTE, HSPA+, HSDPA, HSUPA, WCDMA, GSM, GPRS, EDGE (up to 100 Mbps) LTE, EV-DO, 1xRTT CDMA (up to 100 Mbps)
MicroSIM card slot	One; user accessible, fully sealed
Radio Modem	Internal 406-470MHz UHF radio Internal 902-928/ 868-870 MHz ISM radio (optional)
Base Power Output	1 Watt

I/O

Communication Ports	Wi-Fi 5 GHz and 2.4GHz (802.11 a, b, g, n, d, e, i) Bluetooth 4.1 Compliance and CSA2 Support Dual-mode Bluetooth and Bluetooth LE Full-duplex 10BASE-T/100Base-TX Ethernet port High Speed USB 2.0 Host (480 Mbps) High Speed USB 2.0 Device (480 Mbps)
Other I/O Signals	External GNSS antenna External cellular antenna External radio antenna Inclinometers and compass integrated

USER INTERFACE


SD card slot	High Capacity microSD Card (microSDHC) up to 128GB Class 10; user accessible, fully sealed
LED Indication	On/OFF, Battery status, External power, Cellular, Bluetooth, Wi-Fi, Radio, Ethernet, Satellites, Position, Recording statuses
Buttons	On/Off button; Bluetooth On/Off; Wi-Fi On/Off; Recording On/Off

POWER MANAGEMENT

Battery	Rechargeable, Lightweight Li-Ion battery 42.5 Wh (nom.)
Operation Time	12 hours on one charge
External Power Input	10-40 V DC
Charging	Power management notifies user when battery needs charging and protects battery from overcharging

TRIUMPH-3

LED INDICATORS

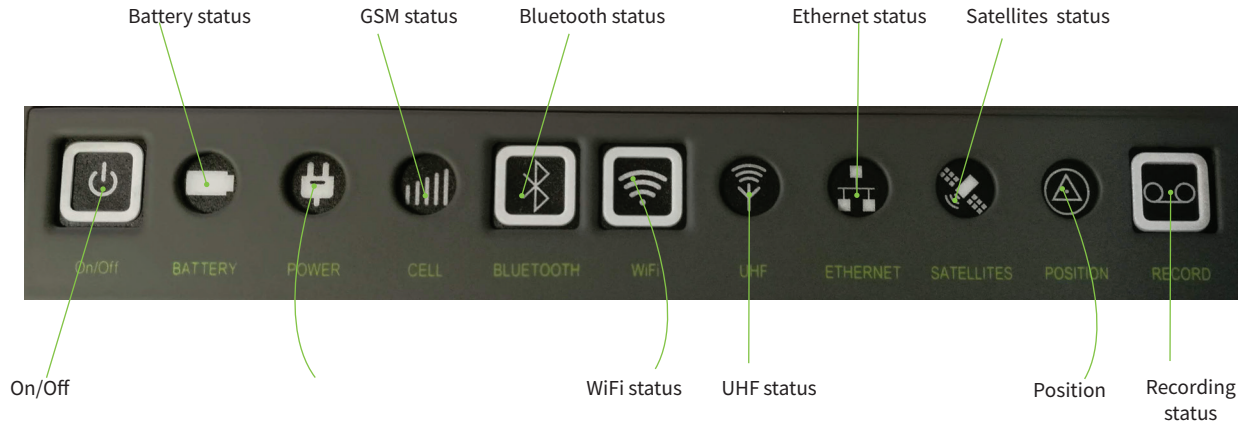

EASY MANAGEMENT WITH NETVIEW&MODEM

NetView&Modem is a free application allowing the user to easily control JAVAD GNSS TRIUMPH-3 receivers, i.e. allowing efficiently managing receiver parameters and commands via a user friendly graphical interface.

EASY MANAGEMENT WITH J-MOBILE

For setting up the base and rover may be afforded using Javad Mobile Tools (J-Mobile) and your mobile device and either the iOS or Android. You can connect your TRIUMPH-3 in field to the mobile device using WiFi connection internally implemented in your receiver.

EASY BASE AND ROVER SETUP WITH TRIUMPH-LS

TRIUMPH-3 receiver can be used together with TRIUMPH-LS as a base or a rover to accomplish high efficient geodetic job.



900 Rock Avenue
San Jose
CA 95131, USA

+1(408)770-1770
sales@javad.com
www.javad.com